

















Revised Bid Attachment 6, Addendum 4

HATCH LEGEND

-  SHELL TRAIL
-  CONCRETE
-  CONCRETE PAVEMENT
-  PLAYGROUND AREA
=965 SY
-  ASPHALT PAVEMENT
-  SOD (ONSITE)
=24,590 SY
-  SOD (OFFSITE-8TH AVENUE)
=1,180 SY
-  SEED & MULCH (ONSITE)
=14,895 SY
-  ADDITIONAL SEED & MULCH (ONSITE)
=6,310 SY
-  NON-POND AREA - 2' CUT BELOW EXISTING GRADE
(4,410 SY / 2,940 CY) & REPLACE WITH CLEAN FILL
TO PROPOSED GRADE (4,410 SY / 4,230 CY)
-  POND AREA - CUT BELOW EXISTING GRADE TO EL=9.5
FT (6,000 SY / 12,380 CY) & REPLACE WITH CLEAN
FILL TO PROPOSED GRADE (6,000 SY / 8,610 CY)
-  PLAYGROUND AREA - 2' OVERCUT BELOW FINISHED GRADE
& REPLACE WITH 2' CLEAN FILL (1,132 SY / 755 CY)
-  OTHER CUT/FILL AREA - 2' OVERCUT BELOW
EXISTING/FINISHED GRADE & REPLACE WITH 2'
CLEAN FILL (1,332 SY / 889 CY)
-  OTHER FILL AREA - 1' CUT BELOW EXISTING
GRADE (613 SY / 205 CY) & REPLACE WITH 2'
CLEAN FILL (613 SY / 410 CY) TO PROVIDE 2'
BUFFER FOR LOW AREA & GRADE TO DRAIN

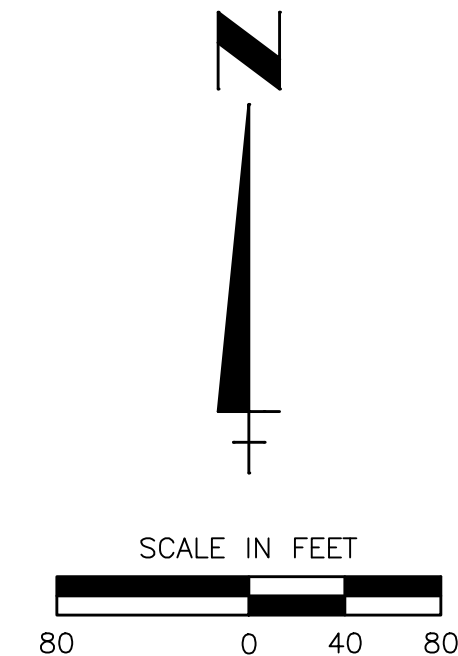

- NOTES:**
- REFER TO INTERTEK/PSI SOIL AND DEWATERING MANAGEMENT PLAN FOR ADDITIONAL INFORMATION ON SOIL MANAGEMENT DURING CONSTRUCTION.

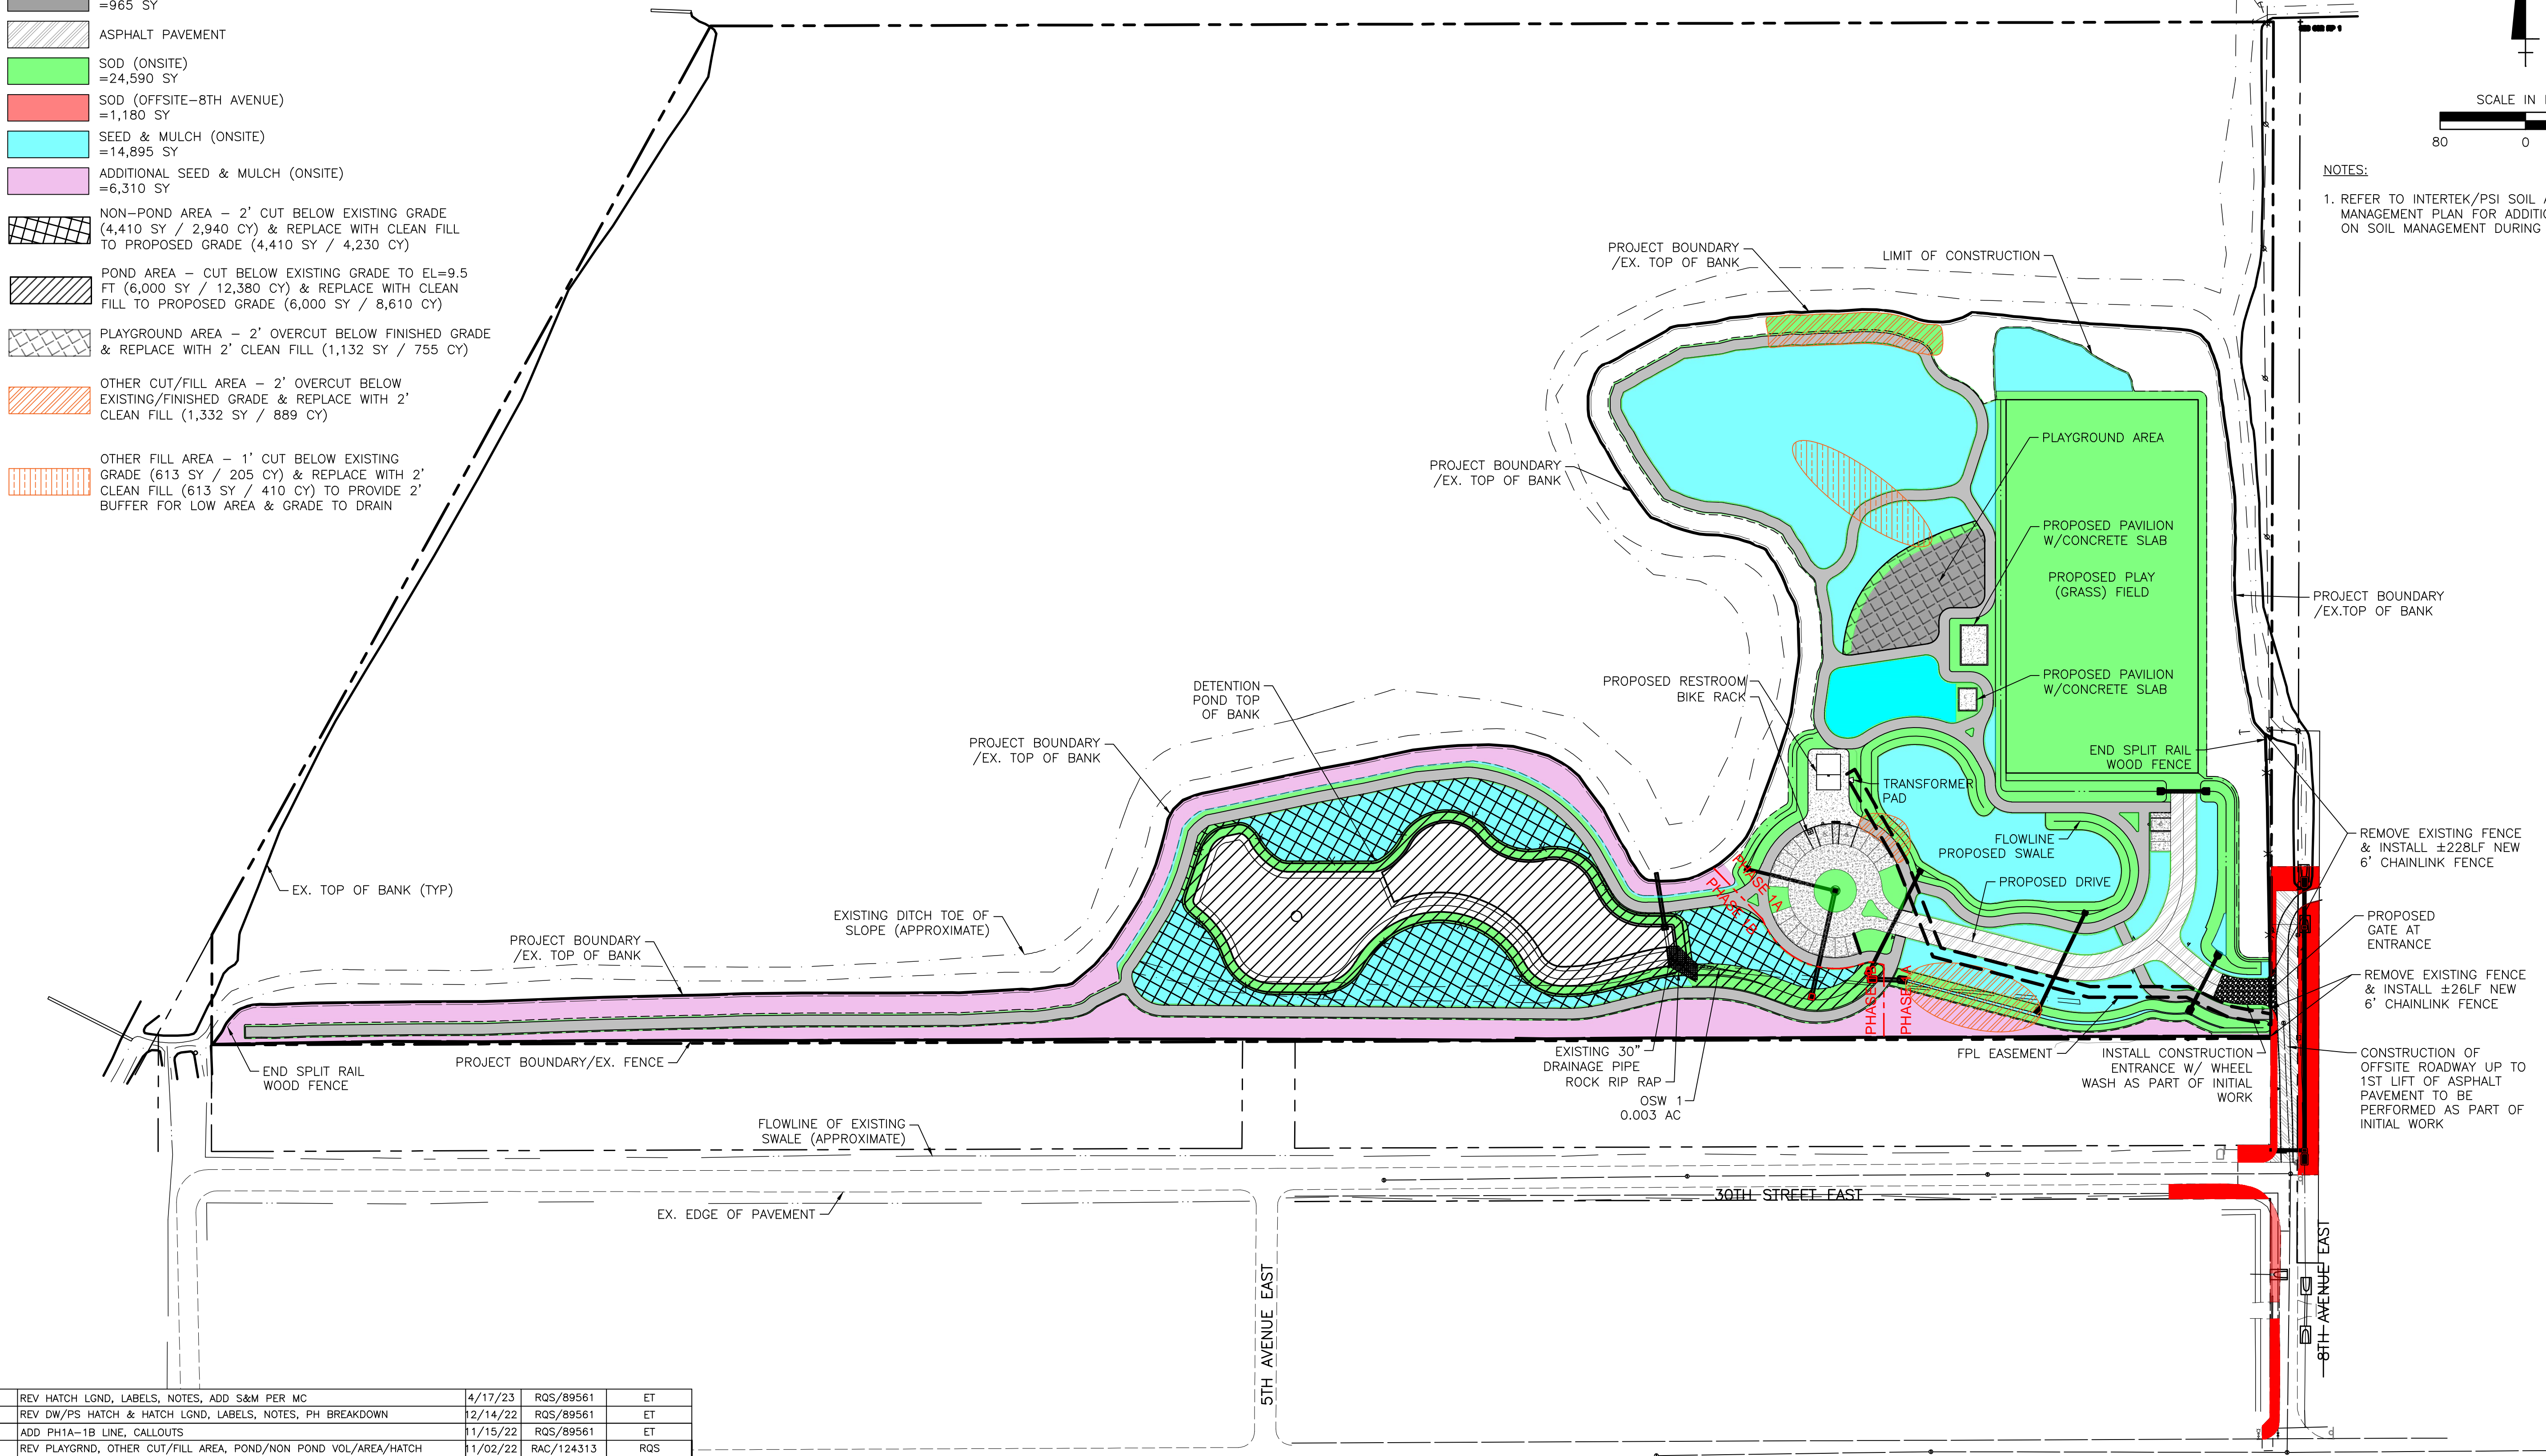

Save: 4/17/2023 5:52 PM GSELLERS | Project: 4/17/2023 7:11:19 PM GSELLERS | V:\1773\seth\177310895\05_report\seth\177310895-05-00-00.dwg

REV NO.	REVISION	DATE	DRAWN BY / EMP. NO.	CHECKED BY / EMP. NO.	WM APPROVED BY:
9	REV HATCH LGND, LABELS, NOTES, ADD S&M PER MC	4/17/23	RQS/89561	ET	
8	REV DW/PS HATCH & HATCH LGND, LABELS, NOTES, PH BREAKDOWN	12/14/22	RQS/89561	ET	
7	ADD PH1A-1B LINE, CALLOUTS	11/15/22	RQS/89561	ET	
6	REV PLAYGRND, OTHER CUT/FILL AREA, POND/NON POND VOL/AREA/HATCH	11/02/22	RAC/124313	RQS	
5	REV RR/SW LOCATION, ADD TRANSFORMER PAD, SOD, FPL EASEMENT	6/21/22	RQS/89561	ET	
4	REV SMP HATCH AREA/VOL, SOD AREA & ADD OTHER SMP HATCH PER MC REVS	4/4/22	RQS/89561	EA	
3	REVISE SOIL MGMT HATCH AREAS/VOL PER MC REVS	2/14/22	RQS/89561	EA	
2	REVISE 3 RAIL WOOD FENCE LOC. PER MC REVS	12/15/21	RQS/89561	EA	
2	ADD SW PROJ AREA SOIL MNGMT HATCH AREAS/VOL PER MC REVS	12/15/21	RQS/89561	EA	
1	REVISE SOD AREA	4/19/21	RQS/89561	EA	
1	REVISE ONSITE SEED/MULCH AREA	4/14/21	RQS/89561	EA	

ACTIVITY	INITIALS/EMP. NO.	DATE
DESIGNED BY:		
DRAWN BY:		
CHECKED BY:		
CONTRACT ADMIN. BY:		



Stantec
6900 Professional Parkway East, Sarasota, FL 34240-8414
Phone: 941-907-6900 • Fax: 941-907-6910
Certificate of Authorization #27013 | www.stantec.com

CLIENT: MANATEE BOARD OF COUNTY COMMISSIONERS
PROJECT: WASHINGTON PARK PRESERVE PHASE I

DATE: JANUARY 2021
TITLE: SOD, SEED & MULCH EXHIBIT
INDEX NUMBER:
SHEET NUMBER: X-01

CROSS REFERENCE FILE NO.:
PROJECT NUMBER: 177310895