



1112 Manatee Avenue West
Bradenton, FL 34205
purchasing@mymanatee.org

Solicitation Addendum

Addendum No.: 6
Solicitation No.: 22-TA004135DJ
Solicitation Title: Moccasin Wallow, I-75 - 301 Segment 1 from US 301 To 115th Avenue East (Copperstone Entrance)
Project No.: 6071261, 6113370, 6113390
Addendum Date: August 15, 2022
Procurement Contact: Dave Janney
Senior Procurement Agent

IFBC 22-TA004135DJ is amended as set forth herein. Responses to questions posed by prospective bidders are provided below. This Addendum is hereby incorporated in and made a part of IFBC 22-TA004135DJ.

The deadline to submit all inquiries concerning interpretation, clarification or additional information pertaining to this IFBC was July 22, 2022.

REPLACE:

SECTION B, BID FORMS, APPEDIX K, BID PRICING FORM

Replace Appendix K Bid Pricing Form Revision No. 2, with the Appendix K Bid Pricing Form Revision No. 3 issued with this Addendum 6 and available for download as a separate attachment.

Q1. I have just noticed on plan sheet 6 of 112 a note that states “1,365.1’ (plus or minus) 30” DIP WATER MAIN TO BE GROUT IN PLACE UNDER EXISTING PAVEMENT”, there is no bid item for this scope of work. There is a Bid Item, number 122, 30” Removal CIP Watermain, but there is no reference to this bid item in specifications SECTION 01150, MEASUREMENT AND PAYMENT, to describe what Bid Item #122 is to include. It appears to us a bid item to grout fill the 1,365LF of pipe should be added to the bid form and the bid quantity for Bid Item 122 would need to be changed to reflect the amount of pipe to be excavated and removed.

R1. Bid Form Item 122.1 has been added. See attached Appendix K Bid Form Revision No. 3.



Q2. There is no specific detail for the type of 3'-0" wide Traffic Separator, please tell us what type we are to bid on.

R2. Use the FDOT SPI 520-020, with a modified width of 3' vs. the 4' section.


Q3. Reference Bid Form, POTABLE WATER (PHASE 1), bid items 124 and 125, are we to bid these casings as jack and bore or open cut? The previous Moccasin Wallow Road project that bid on August 3, 2022 called for steel casing to be installed by open cut. Please clarify.

R3. The contractor will be required to open cut in order to make the connection to the existing pipe and steel casing since the connection point on the existing pipe is underneath existing asphalt. Please note the existing asphalt is being called out to be removed.

Q4. The bid form has nothing for the permanent signage at all as for pay items. They also have not provided the strain pole schedule for the overhead school flashing beacon signs on either side of 115th as well as the required span detail. will you ask the county if they intend on providing more information?

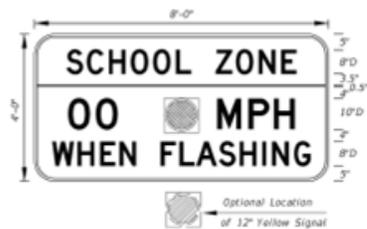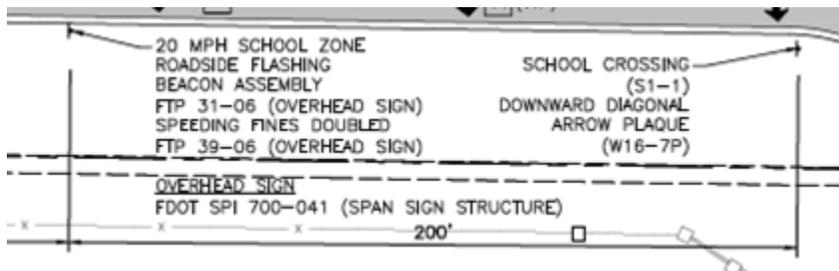

FTP-31-06
8' X 4'
6" Radii 1/2" Border
Series D Legend
Fluorescent Yellow-Green Background Top
White Background Bottom
Black Legend and Border

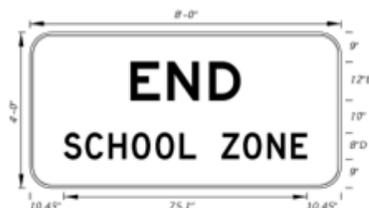

FTP-32-06
8' X 4'
6" Radii 1/2" Border
12" Series E and 8" Series D Legend
White Background
Black Legend and Border



FTP-39-06
4' X 4'
6" Radii 1/2" Border
6" Series D Legend
White Background
Black Legend and Border
Freeway Sign

OVERHEAD SIGN DETAILS

R4. The Overhead School Zone plans will be a separate plan set and will be provided to the awarded contractor to get pricing on. The cost of the overhead school zone signs will be change ordered into the contract. Regarding the signage on the project, the bid form calls out "Traffic Control Signage" as a LS cost for both Phase 1 and Phase 2.

Q5. Is a Preliminary Project Schedule to be submitted with the bid?

R5. Yes, per Bid Attachment 2, Special Provisions, Project Schedule,

The Contractor shall submit a preliminary construction schedule with the bid. The preliminary schedule shall show major work items and any phases the Contractor proposes. The schedule will show duration of work items and phases.

NOTE:

Deleted items will be ~~struck through~~, added or modified items will be underlined. All other terms and conditions remain as stated in the RFQ.

INSTRUCTIONS:

Receipt of this Addendum must be acknowledged as instructed in the solicitation document. Failure to acknowledge receipt of this Addendum may result in the response being deemed non-responsive.

END OF ADDENDUM

AUTHORIZED FOR RELEASE